



Local Triband Antenna GSM 900/1800/1900

Order-No.:700-751-ANT01

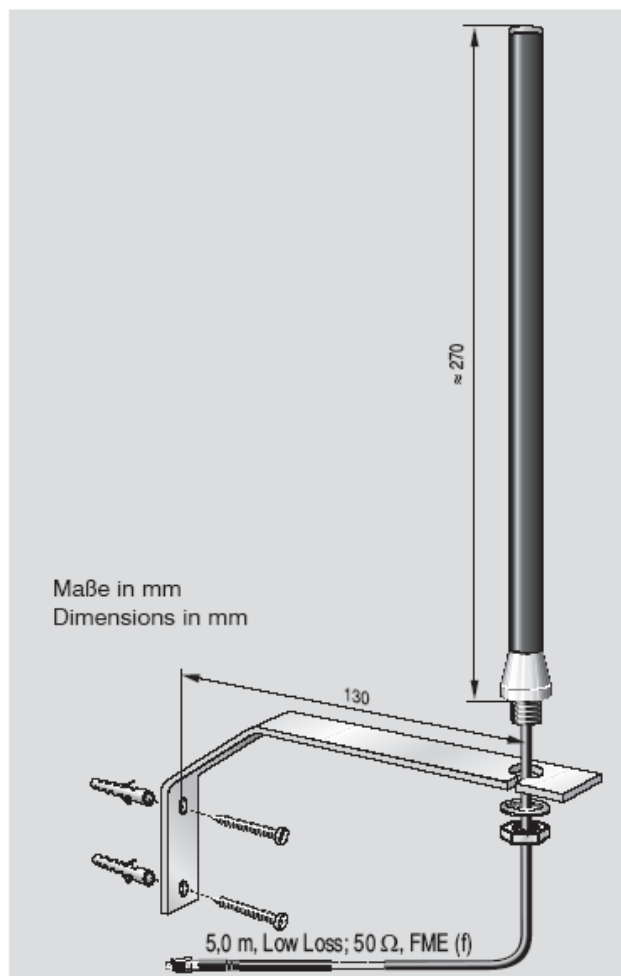


Directional diagram:

Polarisation:
vertikal bei 900 MHz



Polarisation:
vertikal bei 1800 MHz

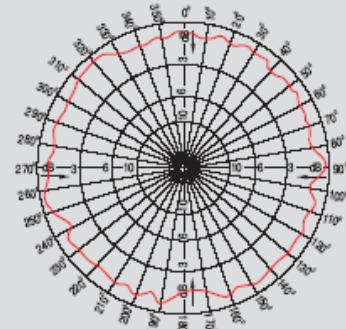

The stationary antenna (Mini Base Station Antenna) is fastened on a mounting bracket for installation on vertical surfaces considers in favourable transmission position. Likewise the antenna is suitable for external and internal areas.

A possible way in touch with repeaters is to be improve the field strength situation in public buildings, halls, underground garages, concrete/steel buildings, subways and so on decisive. In the near of radiator metallic surfaces should be avoid.

Structural Construction:

The radiator is protected placed in a plastic tube.

Electrical Parameters:

Frequency ranges/MHz	890 – 960	1710 – 1880	1880 – 1990
VSWR	$\leq 2:1$	$\leq 2:1$	$\leq 2,2:1$
Gain	≈ 2 dB	≈ 2 dB	0 dB
Impedance	50Ω	50Ω	50Ω
Polarization	linear vertical	linear vertical	linear vertical
max. power	20 W	20 W	20 W
Cable	5 m*	5 m*	5m*
Connector	FME (f)	FME (f)	FME (f)

*) Special cable with low attenuation „Low Loss“

Technical alterations reserved